






Power Modules

Power Modules Horizontal Versions for Plug-in

With decoupling diodes



RENATA Part name	RENATA Part number	Nominal capacity (mAh)	Nominal voltage (V)	Encapsu- lated cell	Weight (g)	Maximum dimensions (mm)			
						A	B	C	D
1000-1B	700036	950	3	CR2477N	15.0	30.0	10.0	25.4	22.9

Operating temperature range:

Self-discharge rate:

Specifications - module housings:

- plug-in pins:

-40°C to +85°C

less than 1% per year at 25°C



polyamide 66

gold plated

Power Modules

Power Modules Horizontal Versions for Plug-in (cont.)

Without decoupling diodes

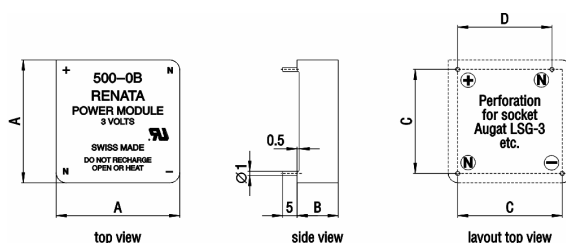

RENATA Part name	RENATA Part number	Nominal capacity (mAh)	Nominal voltage (V)	Encapsu- lated cell	Weight (g)	Maximum dimensions (mm)			
						A	B	C	D
175-0B	700041	235	3	CR2032	6.5	22.0	8.0	17.8	15.3
1000-0B	700033	950	3	CR2477N	15.0	30.0	10.0	25.4	22.9

Operating temperature range:

Self-discharge rate:

Specifications - module housings:
- plug-in pins:

-40°C to +85°C

less than 1% per year at 25°C

polyamide 66
gold plated